

①



Europäisches Patentamt
European Patent Office
Office européen des brevets

⑪ Veröffentlichungsnummer:

⑪ Publication number:

⑪ Numéro de publication:

0 1 1 8 4 5 7

Internationale Anmeldung veröffentlicht durch die
Weltorganisation für geistiges Eigentum unter der Nummer:

WO 84/00795 (art.158 des EPÜ).

International application published by the World
Intellectual Property Organisation under number:

WO 84/00795 (art.158 of the EPC).

Demande internationale publiée par l'Organisation
Mondiale de la Propriété Intellectuelle sous le numéro:


WO 84/00795 (art.158 de la CBE).



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ³ : F16K 31/44	A1	(11) International Publication Number: WO 84/ 00795 (43) International Publication Date: 1 March 1984 (01.03.84)
(21) International Application Number: PCT/US83/00726 (22) International Filing Date: 11 May 1983 (11.05.83) (31) Priority Application Number: 409,430 (32) Priority Date: 19 August 1982 (19.08.82) (33) Priority Country: US (71) Applicant: VAPOR CORPORATION [US/US]; 6420 W. Howard Street, Chicago, IL 60648 (US). (72) Inventors: ALEXANDRE, William, H. ; 15235 Stradbrook Drive, Houston, TX 77062 (US). DARE, Roy, R. ; 15919 Baytree Street, Houston, TX 77070 (US). (74) Agent: LIDD, Francis, J.; Vapor Corporation, 6420 W. Howard Street, Chicago, IL 60648 (US).		(81) Designated States: BE (European patent), DE, DE (Auxiliary utility model), DE (European patent), FR (European patent), GB (European patent), JP. Published With international search report.

(54) Title: FIRE SAFE PLUG VALVE

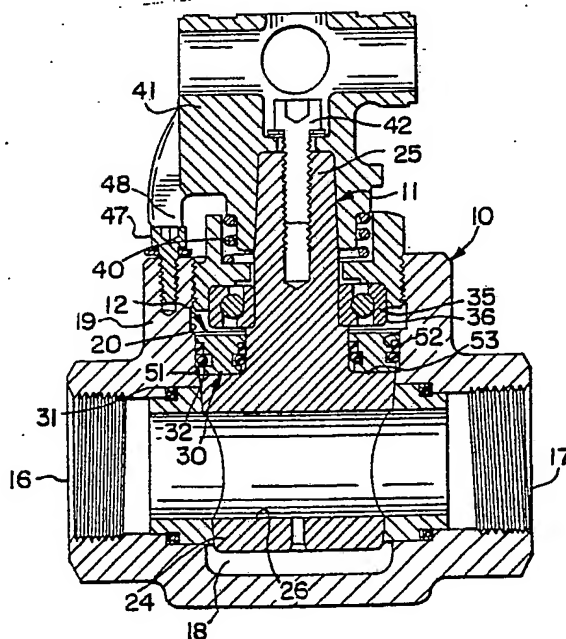

(57) Abstract

A valve for controlling the flow of fluids of a flammable nature and under high pressure, which includes a hollow body (10) having a plug (24) rotatably mounted within the body between the floating seats (30) at inlet (16) and outlet ports (17) with a packing plate (12) in the bonnet (19) capable of maintaining a seal against loss of fluids when the valve has been subjected to high temperature caused by fire.